



CFE-1280S




CFE-1280S



- 1.The appearance size is greatly reduced
- 2.Added LED power display
- 3.Added switch button
- 4.The five-year warranty cannot be achieved for the plastic housing, we replaced it with 304 stainless steel
- 5.The entire product achieves IP67
- 6.The heat dissipation capacity of the product is greatly improved, and the whole battery supports 1C charge and discharge
- 7.For external terminals, we have made a quick connect configuration, which is convenient to use and insulated at the same time
- 8.Stainless steel handles on both sides, 3000 vibrations in three directions will not be a problem
- 9.The battery supports up to 4 external connections in series, up to 51.2Vgassing


Main models & Technical spec

Index		Spec
Model		12V100Ah
Nominal Voltage		12.8V
Nominal Capacity @1C		100Ah
Charge Voltage		14.6V
Recommended Charge Current		50A
	Max Continuous	100A
Discharge Voltage Minimum		10V
Discharge Current Max Continuous		100A
Pulse Current 5 Sec		150A
Weight		12kg±0.5kg
Dimensions L*W*H (mm)		320*140*210

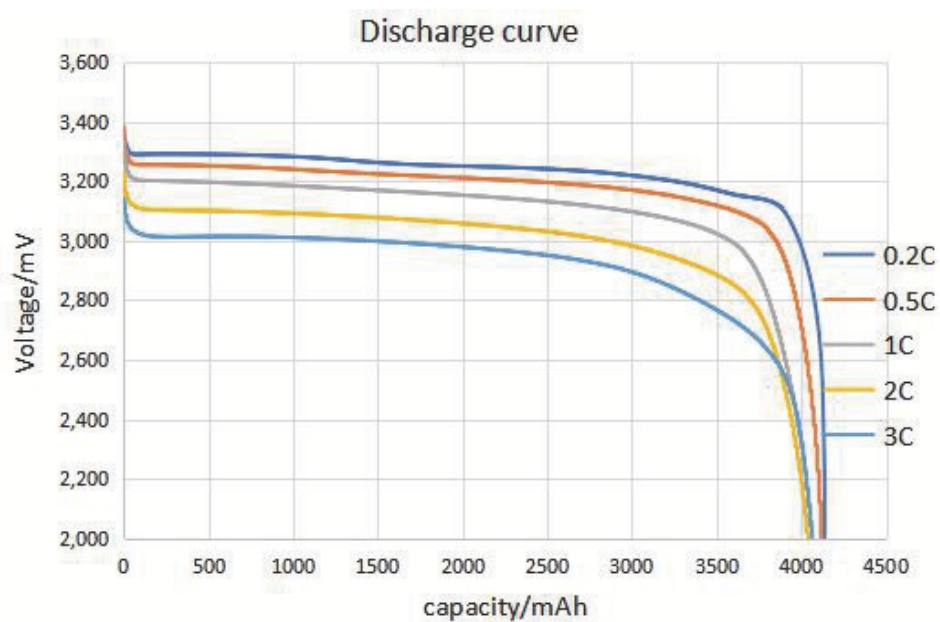

Main models & Technical spec

Index	Spec
Operating Temperature	Charging: 0°C to 50°C
	Discharging : -20°C to 60°C
Storage Temperature	1 year : -20~25°C
	3 months : -20~45°C
	1 month : -20~60°C
Relative Humidity(RH) Protection	20~60 (No Condensed Water) IP56
Safety Certificate	CE
Transportation	UN38.3

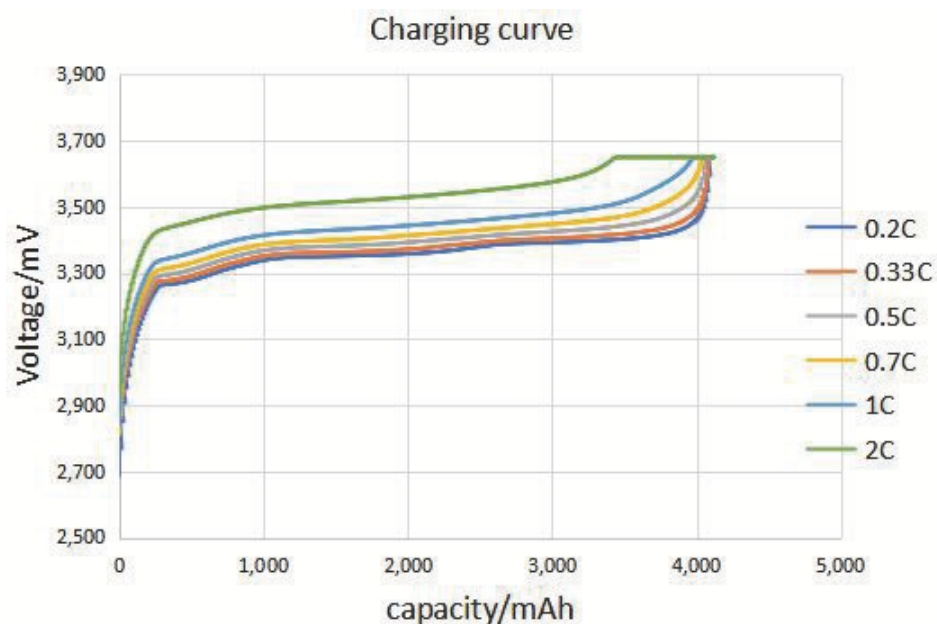

Battery Management System

Index	Spec	
Voltage	Charging Voltage Cutoff	14.6V (Single battery : 3.65V)
	Maximal Continuous Charging Current	100A
Current	Maximal Continuous Discharging	100A
	Current Over Charge Detection Voltage	14.6V (Single battery : 3.65V)
Overcharge Protection	Over Charge Detection Delay time(mS)	1000±500
	Over Charge Release Voltage	14V (Single battery: 3.5V)
	Over Discharge Detection Voltage	10V (Single battery: 2.5V)
Over Discharge Protection	Over Discharge Detection delay time(mS)	1000±500
	Over Discharge Release Voltage	11.2V (Single battery: 2.8V)
	Exterior Short Circuit Voltage	300±200uS
Short Circuit Protection	Detection Condition	Cut Load,Automatically
	Detection Delay time	Recover 65°C
	Release Condition	
Temperature Protection	Over Temperature Protection	




First-class power battery system supplier
First-class supplier of energy storage and microgrid

Distributor



CF Energy Co., Ltd.

Company Address:
Intelligent Manufacturing Base , Xianyang , Shaanxi , PRC .
Web:<http://www.cfenergy.net/> E-mail:sales@cfpower.vip

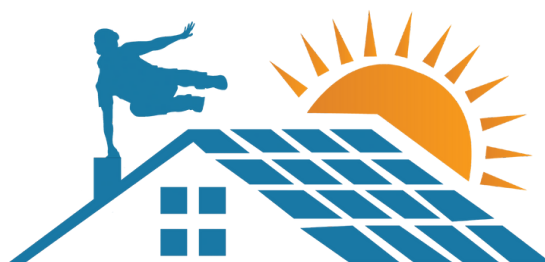

chillnet Solar
the power of simplicity