




Product Service

# CERTIFICATE

No. Z2 099333 0054 Rev. 03

**Holder of Certificate: LONGi Green Energy Technology Co., Ltd.**  
 No. 388, Middle Hangtian Road  
 Chang'an District  
 710100 Xi'an City, Shaanxi  
 PEOPLE'S REPUBLIC OF CHINA

**Certification Mark:**

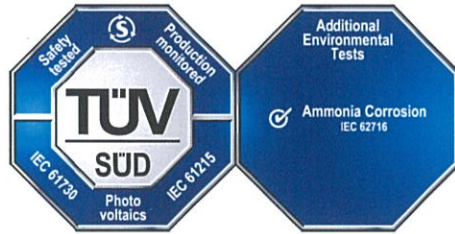

**Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**  
**Mono-crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition the certification holder must not transfer the certificate to third parties. See also notes overleaf.

**Test report no.:** 704061700518-03

**Valid until:** 2024-12-04

**Date,** 2019-12-06 ( David Bo )



TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD  
**ZERTIFIKAT ♦ CERTIFICATE ♦ 認證證書 ♦ CERTIFICADO ♦ CERTIFICAT**

A4 / 07-17



Product Service

# CERTIFICATE

No. Z2 099333 0054 Rev. 03

## Model(s):

LR6-72HV-xxxM, (xxx=320 to 350 in step of 5)  
 LR6-60HV-xxxM, (xxx=270 to 300 in step of 5)  
 LR6-72PH-xxxM, (xxx=340 to 385 in step of 5)  
 LR6-60PH-xxxM, (xxx=280 to 320 in step of 5)  
 LR6-72HPH-xxxM, (xxx=350 to 405 in step of 5)  
 LR6-72HIH-xxxM, (xxx=350 to 405 in step of 5)  
 LR6-60HPH-xxxM, (xxx=295 to 335 in step of 5)  
 LR6-60HIH-xxxM, (xxx=295 to 335 in step of 5)  
 LR6-72OPH-xxxM, (xxx=385 to 400 in step of 5)  
 LR6-60OPH-xxxM, (xxx=335 to 350 in step of 5)  
 LR6-72HPH-xxxMC, (xxx=375 to 390 in step of 5)  
 LR6-60HPH-xxxMC, (xxx=305 to 325 in step of 5)  
 LR4-72HPH-xxxM, (xxx=400 to 460 in step of 5)  
 LR4-72HIH-xxxM, (xxx=400 to 460 in step of 5)  
 LR4-60HPH-xxxM, (xxx=330 to 380 in step of 5)  
 LR4-60HIH-xxxM, (xxx=330 to 380 in step of 5)  
 LR4-72ZPH-xxxM, (xxx=420 to 435 in step of 5)  
 LR4-60ZPH-xxxM, (xxx=350 to 365 in step of 5)  
 LR6-60ZPH-xxxM, (xxx=330 to 355 in step of 5)  
 xxx is standing for rated output power at STC

## Parameters:

Application Class:	Class A
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class C
Construction:	Framed, with Junction box, cable and connector.

## Tested according to:

IEC 61215:2005  
 IEC 61730-1:2004  
 IEC 61730-1:2004/AMD1:2011  
 IEC 61730-1:2004/AMD2:2013  
 IEC 61730-2:2004  
 IEC 61730-2:2004/AMD1:2011  
 IEC 62716:2013

## Production Facility(ies):

099605, 099606, 099626, 090968, 001192, 002875, 096558, 097323, 102892, 103410, 103841

TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD  
 ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

A4 / 07.17