

EEEEASILY
MORE.

Excellent. Efficient. Expert.

The Value-Added Modules of the IBC SOLAR Line.

IBC MonoSol 400, 405 CS10-HC

First-class solar modules made of monocrystalline half-cut-cells



25 year power and
10 year product warranty¹



Positive power tolerance (-0/+5)



Increased mechanical stability (5400 Pa)



German warrantor



100% tested quality



Improved management thanks to half-cut-technology

IBC SOLAR – your partner for energy solutions

IBC SOLAR AG has had a successful presence in the photovoltaic market for more than 35 years and is one of the leading international energy companies providing high-performance solutions in every size and for every application with intelligent photovoltaic systems. The economic strength and financial independence is confirmed by globally recognised ratings.

Smart Systems for Solar Power thanks to perfectly matched components. More than 1,000 highly qualified partners around the world, as well as more than 4,200 megawatts of installed power, which supply around 2 million people with clean energy, underline IBC SOLAR's position as a leading PV system integrator from Germany and the high level of expertise of IBC SOLAR.



Management
System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 9105069440



Engineered
in GERMANY

The ideal solution for:



TECHNICAL DATA

IBC MonoSol	400 CS10-HC	405 CS10-HC
Article number	2003800032	2003800033

Electrical data (STC):		
STC Power Pmax (Wp)	400	405
STC Nominal Voltage Umpp (V)	30.56	30.73
STC Nominal Current Impp (A)	13.10	13.19
STC Open Circuit Voltage Uoc (V)	36.87	37.07
STC Short Circuit Current Isc (A)	13.55	13.64
Module Efficiency (%)	20.48	20.74
Power Tolerance (Wp)	-0/+5	-0/+5

Electrical data (NOCT):		
800 W/m ² NOCT AM 1.5 Power Pmax (Wp)	300	303
800 W/m ² NOCT AM 1.5 Nominal Voltage Umpp (V)	28.89	29.04
800 W/m ² NOCT AM 1.5 Open Circuit Voltage Uoc (V)	34.92	35.01
800 W/m ² NOCT AM 1.5 Short Circuit Current Isc (A)	11.08	11.14
Relative Efficiency Reduction at 200 W/m ² (%)	4.3	4.3

Temperature		
NOCT (°C)	45	45
Tempcoeff Isc (%/°C)	+0.048	+0.048
Tempcoeff Voc (mV/°C)	-92.91	-93.42
Tempcoeff Pmpp (%/°C)	-0.332	-0.332


Operating conditions:	
Max. System Voltage (V)	1500
Application Class	A
Reverse Current Ir (A)	25
Current value string fuse (A)	25
Fuse protection from parallel strings	2

Mechanical properties:	
Dimensions (L × W × H in mm)	1722 × 1133 × 35
Weight (kg)	20.0
Max. Test load, Push/Pull (Pa)	5400/2400
Max. Design load ² , Push/Pull (Pa)	3600/1600
Front sheet (mm)	3.2 (low-iron photovoltaic glass and anti-reflective coating)
Frame	anodized aluminium, sturdy hollow-chamber frame
Cells	12 × 9 mono-crystalline silicon cells
Connection type	EVO2

Warranties and	
Product warranty	10 years ¹
Power warranty	25 years ¹
Certification	IEC 61215, IEC 61730-1/-2, ISO 9001, ISO 14001, OHSAS 18001

Packaging information:	
Number of modules per pallet	31
Number of pallets per 40'	26
Dimensions incl. pallet (L × W × H in mm)	1760 × 1130 × 110
Gross weight incl. double pallet (kg)	1255 720
Stackability per pallet	2-fold

25 year linear power warranty by IBC SOLAR

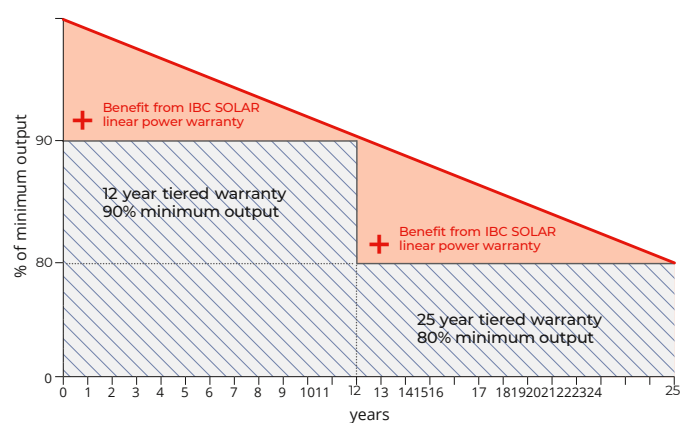


----- linear power warranty¹ IBC SOLAR
 ----- 12 year tiered warranty 90% / 25 year 80%

¹⁾ The warranty presupposes installation in accordance with the valid installation instructions. Standard test conditions: 1000 W/m² irradiation with a spectral distribution of AM 1.5 and a cell temperature of 25 °C. 800 W/m², NOCT. Information according to EN 60904-3 (STC).

All values according to DIN EN 50380. The precise conditions and content can be taken from the respectively valid version of the product and power warranty, which you obtain from your IBC Premium Partner. Subject to errors and modifications.

²⁾ Loads according to IEC 61215-2:2016, max. design load

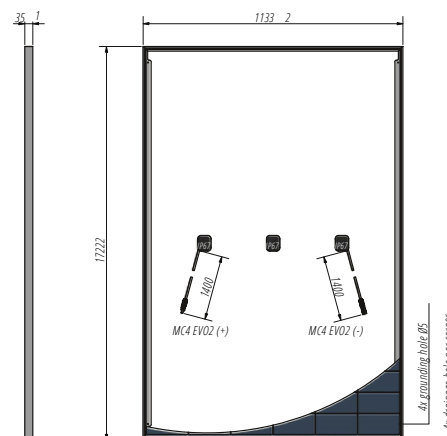

Presented by:

As of: 2022-02-16 9001500121